

THERMO SEALER


The PackRite Thermo Motor-Jaw Sealer is a versatile, motorized heat sealing machine that provides either continuous automatic or intermittent stop/start cycling with the flip of a switch. In the automatic mode, up to 30 packages per minute can be sealed. In the intermittent mode, the machine can be controlled by foot-pedal stop/start cycling.

In both modes, dwell time and pressure are machine-controlled for all materials, so there's no guesswork. With the exception of the optional adjustable dwell, the only adjustment required is the thermostat, which can be set at any sealing temperature up to 550°F.

Sealing action of the Thermo Motor-Jaw is fast, easy and efficient. The integrity of the seal itself is airtight. A choice of three sealing impressions is standard – flat seal, vertical crimp and horizontal crimp.

The machine accommodates a wide variety of thermoplastic materials, including cellophane, polycel, kraft and scrim-backed laminates, overcap labels, plus many foils and MIL Spec materials.

The compact size of this PackRite sealer allows it to fit in a bench space of just 7" x 11-1/2". With jaws open, it is only 11-1/4" high.

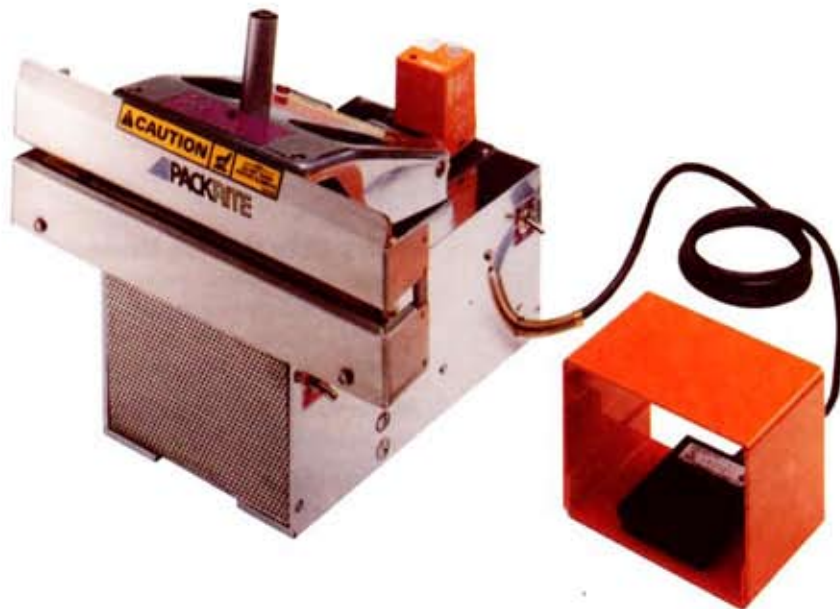

Three Sealing Impressions (1" Wide)



Flat Seal. Flat, smooth 1"-wide bars are recommended for extra heat penetration on heavier materials, laminates, overcap labels, and MIL Spec materials.



Horizontal Crimp. Attractive serrations run lengthwise across bars (16 on a 1"-width)



Vertical Crimp. The 1"-wide, 16 vertical-serrations-per-inch seal provides an attractive sealing impression on cellophane and light materials.